

# NoMorePly - Guarantee and guidance

## Lifetime Guarantee Terms

The **NoMorePly** board lifetime guarantee only applies when the correct installation procedures, as set out in our Installation Guide, have been followed and the recommended **NoMorePly** system essentials used during installation.

### LIFETIME GUARANTEE



## For guidance only

As conditions of use and any labour involved are beyond our control, the end user must satisfy himself by prior testing that the product is suitable for his specific application. No responsibility can be accepted or any warranty given by our representatives, agents or distributors.



## Tested and Approved

The BBA is the UK's major authority offering approval of construction products, systems and installers. **NoMorePly** 6mm boards have been assessed by BBA as being fit for intended use provided they are installed correctly. BBA Certificate No. 08/4575.

Tested and approved: **NoMorePly** 6mm boards with CE approval and low in emissions.



## Helpful Facts

**50 screws** are enough for **6 boards**

**200 screws** are enough for **25 boards**

**NoMorePly** will hold the heaviest tiles. **65kg per m<sup>2</sup>** is no problem when fitted correctly

**6mm boards** are 1200mm x 600mm = **0.72m<sup>2</sup>**

**12mm boards** are 1200mm x 800mm = **0.96m<sup>2</sup>**

**1 tube of Mega Strength** for every **5 boards**

**1litre of NoMorePly Tiler's Primer** - diluted 3:1 with water = **40m<sup>2</sup>**

For sales or advice on installation

Call: **0800 0094 354** or Visit: **NoMorePly.net**

Lines open: Monday-Friday **7am-5pm**

**NoMorePly**<sup>®</sup>

# NoMorePly<sup>®</sup>

## Fibre Cement Board

The first tile backing system with a lifetime guarantee

QUICK & EASY



THIN PROFILE



STRONGER BUILD



WATER RESISTANT



NON COMBUSTIBLE



LIFETIME GUARANTEE



'It's quick and easy, and we're not called back to fix cracked tiles'

Jamie Reed

Professional tiler since 2005



QUICK  
& EASY



THIN  
PROFILE



STRONGER  
BUILD



WATER  
RESISTANT



NON  
COMBUSTIBLE



LIFETIME  
GUARANTEE



## Why professionals choose NoMorePly

NoMorePly is a tile backing system used to create a perfect foundation on which to tile floors and walls; ideal for bathrooms, kitchens, wet rooms and comes highly recommended by professional tilers.


- **Quick and easy** to handle, cut and lay
- **Thin**, so avoids any unwanted step into the tiled area
- **Strong**, therefore ideal for large and heavy tiles
- **Water resistant**, unlike plywood which weakens when damp
- **Non combustible**, providing fireproofing wherever it's needed
- **A lifetime guarantee**, providing complete peace of mind

Follow the guidance in this leaflet to learn best practice on installing the NoMorePly system.

For sales or advice on installation

Call: 0800 0094 354 or Visit: [NoMorePly.net](http://NoMorePly.net)

# NoMorePly® is the versatile system for all surfaces

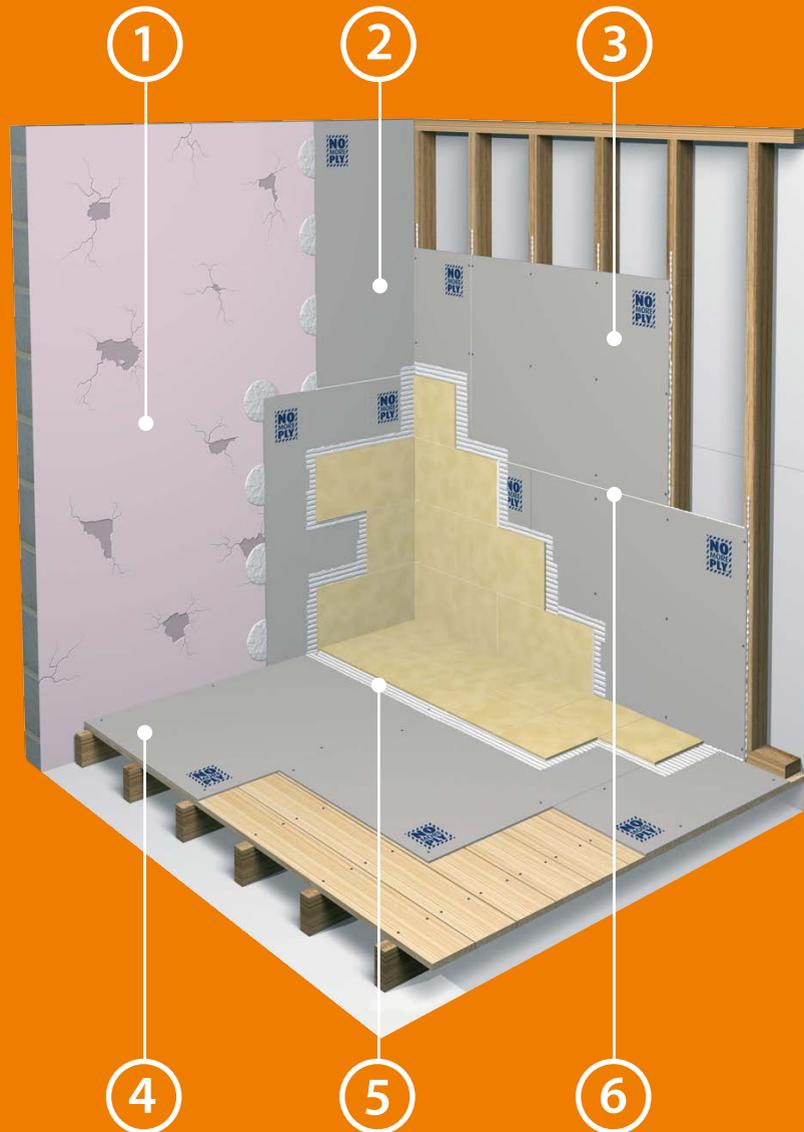

## The System

- 1 Prime solid walls with **NoMorePly** Tiler's Primer (1 part primer to 3 parts water) before boarding
- 2 Use 6mm or 12mm **NoMorePly** boards on solid walls - prime the boards on both sides then 'dot and dab' with tile or board adhesive
- 3 Use 12mm **NoMorePly** fixed with MEGA Strength and screws for boarding wood or metal stud walls
- 4 Use 6mm **NoMorePly** fixed with MEGA Strength and screws when over boarding timber floors. Use 6mm fixed with flexible rapid-set tile adhesive onto old concrete floors
- 5 Always use a good quality single part flexible adhesive for fixing tiles
- 6 Always use MEGA Strength on all joints for extra strength and complete waterproofing

## The Essentials

### Cement based boards

6mm (1200 x 600mm)  
12mm (1200 x 800mm)

### MEGA Strength adhesive

Fast setting Polyurethane adhesive delivers an exceptionally strong and waterproof seal

### Scoring knife

Used for cutting boards with ease

### NoMorePly Tiler's Primer (1 litre)

Used to seal and improve the bond with tile adhesive, helps reflect heat to improve insulation and provide a waterproof coating

### Screws (25mm and 38mm)

Self drilling and self counter-sinking. Available in packs of 50 or 200



For sales or advice on installation

Call: 0800 0094 354 or Visit: [NoMorePly.net](http://NoMorePly.net)

**NoMorePly®**

## Over Boarding Timber Floors



### Step 1

Remove any old existing floor coverings, screw down floorboards firmly (timber or chipboard) and sweep clean.

You are now ready for **NoMorePly**.



### Step 2

Run two beads of Mega Strength adhesive around the back of the board. See application of outer bead in picture 2A.

Screw down firmly using 8 x 25mm **NoMorePly** screws. Ideally, position the screws 25mm from the edge of the boards.

**Cutting Boards** NoMorePly boards can be easily cut by scoring one side with a scoring knife, then snapping over a block. For curves and shapes use tile nippers.



### Step 3

Apply a small bead of Mega Strength to the edge of each board to seal and reinforce the joints. Stagger the joints where possible.

Wipe off excess adhesive using a cloth and use solvent in case of spillage.

**Always wear gloves!**



### Step 4

Finish by priming the boards using **NoMorePly** Tiler's Primer (mixed 1 part primer to 3 parts water).

This will improve tile adhesion. If electric underfloor heating is being used, apply two coats of primer to help reflect heat into the room.

**Now you're ready to tile!**

For sales or advice on installation  
Call: 0800 0094 354 or Visit: [NoMorePly.net](http://NoMorePly.net)

**NoMorePly**

### Helpful Facts

50 screws are enough for 6 boards  
200 screws are enough for 25 boards

## Over Boarding **Solid Floors**



### Step 1

6mm **NoMorePly** is ideal for covering dirty, cracked, worn out concrete floors. Always start by removing loose material, then prime the floor with one coat of **NoMorePly** Tiler's Primer (mixed 1 part primer to 3 parts water).

Boards must also be primed both sides using **NoMorePly** Tiler's Primer mixed in the same way.



### Step 2

For best results, lay **NoMorePly** on single part flexible rapid set adhesive. This can straddle both solid and timber flooring surfaces. Stagger the boards where possible.

**Cutting Boards** **NoMorePly** boards can be easily cut by scoring one side with a scoring knife, then snapping over a block. For curves and shapes use tile nippers.



### Step 3

Apply a small bead of MEGA Strength onto the edges of each board to achieve a waterproof seal. Wipe off excess adhesive using a cloth and use solvent in case of spillage.

**PRO TIP** - Always prime the boards both sides to improve tile adhesion



### Step 4

When boards have straddled both solid and timber flooring, use 6 to 8 screws per board to secure into any timber floorboards.

**Now you're ready to tile!**

For sales or advice on installation  
Call: 0800 0094 354 or Visit: [NoMorePly.net](http://NoMorePly.net)

**NoMorePly**®

### Helpful Facts - Coverage

6mm boards are 1200mm x 600mm = 0.72m<sup>2</sup>  
12mm boards are 1200mm x 800mm = 0.96m<sup>2</sup>

## Over Boarding Stud Walls



### Step 1

Use 12mm **NoMorePly** boards on stud walls and approach metal stud work in exactly the same way as you would timber.

Run a bead of MEGA Strength on all vertical and horizontal joints before fixing the board.

This helps combat movement that may occur due to timber shrinkage.



### Step 2

Screw the 12mm **NoMorePly** to the stud work using approximately 9 x 38mm screws per board.

**Cutting Boards** **NoMorePly** boards can be easily cut by scoring one side with a scoring knife, then snapping over a block. For curves and shapes use tile nippers.



### Step 3

Run a bead of Mega Strength around the edge of each board before offering up the next board. This reinforces and waterproofs the joint eliminating the need to tape the joints.

Stagger the boards where possible.

Wipe off excess adhesive using a cloth and use solvent in case of spillage.

**PRO TIP-Studs to be max 400mm centres**



### Step 4

Finish by priming the boards using **NoMorePly** Tiler's Primer (mixed 1 part primer to 3 parts water). This will improve tile adhesion and fully waterproof the **NoMorePly** boards.

**Now you're ready to tile!**

For sales or advice on installation  
Call: 0800 0094 354 or Visit: [NoMorePly.net](http://NoMorePly.net)

**NoMorePly**

### Helpful Facts

**NoMorePly** will hold the heaviest tiles. **65kg per m<sup>2</sup>** is no problem when fitted correctly

## Over Boarding Solid Walls



### Step 1

Use either 6mm or 12mm **NoMorePly** for covering solid walls.

Always start by priming the wall with one coat of **NoMorePly** Tiler's Primer (mixed 1 part primer to 3 parts water).

Boards must also be primed both sides using **NoMorePly** Tiler's Primer mixed in the same way.



### Step 2

For best results, simply 'dot and dab' using a single part flexible tile or board adhesive.

Apply the boards directly to the wall keeping them level, plumb and flat.

**Cutting Boards** NoMorePly boards can be easily cut by scoring one side with a scoring knife, then snapping over a block. For curves and shapes use tile nippers.



### Step 3

Apply a small bead of MEGA Strength onto the edges of each board to achieve a waterproof seal.

Wipe off excess adhesive using a cloth and use solvent in case of spillage.

Stagger the boards where possible, using a straight edge to keep the boards plumb.

**PRO TIP - MEGA Strength adhesive will achieve a waterproof seal, so there's no need for tape**



### Step 4

Different adhesives have different curing times, so in order to proceed quickly we recommend 4 x mechanical fixings per board.

Simply drill the boards, plug and screw fixings.

**Now you're ready to tile!**

For sales or advice on installation  
Call: 0800 0094 354 or Visit: [NoMorePly.net](http://NoMorePly.net)

**NoMorePly**<sup>®</sup>

### Helpful Facts - Coverage

**1 tube Mega Strength** for every **5 boards**

**1 litre Tiler's Primer** diluted 3:1 with water = **40m<sup>2</sup>**

## Boarding Wetrooms



### Step 1

Place boards into position around the tray to check fit.

Run two beads of MEGA Strength adhesive onto the back of **NoMorePly**.



### Step 2

Apply a bead of MEGA Strength around the tray before placing the first boards into position.

Apply a bead of MEGA Strength around the edges of each board to achieve a waterproof seal.

Stagger the boards where possible.

Secure each board with 8 x 25mm screws and continue laying boards as described on page 6.

For sales or advice on installation  
Call: 0800 0094 354 or Visit: [NoMorePly.net](http://NoMorePly.net)

**NoMorePly**®


**Cutting Boards** **NoMorePly** boards can be easily cut by scoring one side with a scoring knife, then snapping over a block. For curves and shapes use tile nippers.



### Step 3

Tape between the shower tray and the **NoMorePly** board to complete the fix.

Finish by priming with two coats using **NoMorePly** Tiler's Primer (mixed 1 part primer to 3 parts water). This will improve tile adhesion and ensure the complete waterproofing.

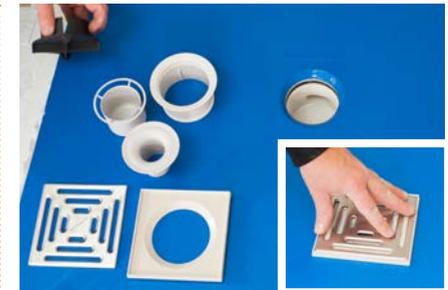

### Kaskade Wetrooms

**NoMorePly** 6mm boards work in conjunction with Kaskade, the ultra slim walk-in shower tray, for a true 'no step' wetroom effect.

Kaskade trays come in a choice of three sizes to suit most requirements and all include a trap.

These trays provide an ideal surface to tile directly onto.

**For full fitting instructions, please visit: [kaskadewetrooms.com](http://kaskadewetrooms.com)**

